
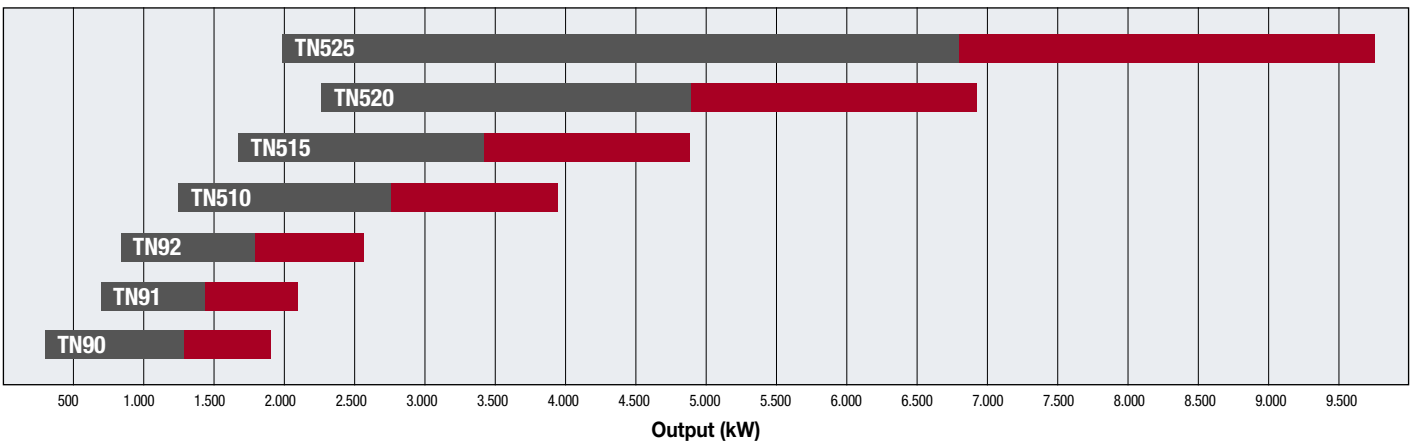
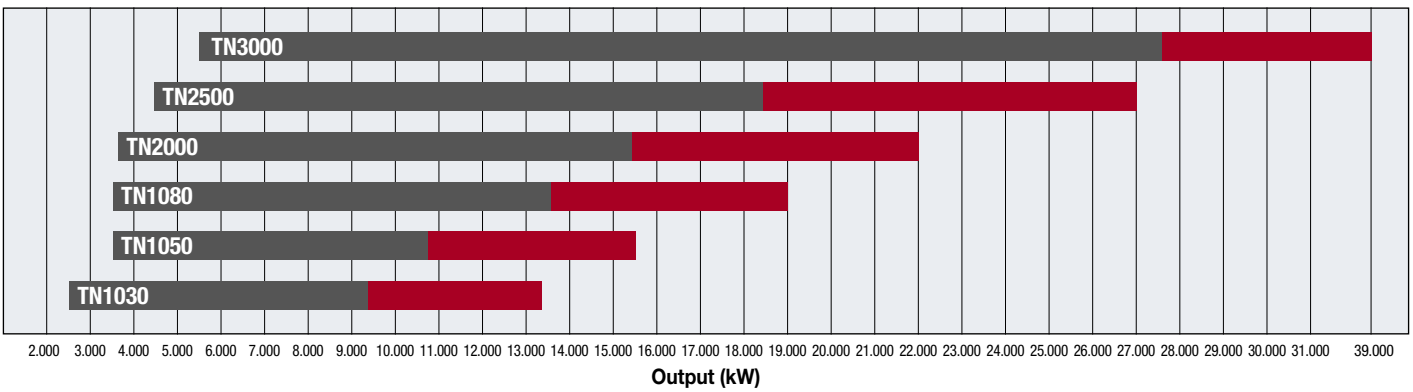


# TN TYPE TN90 ... TN3000

with viscosity up to 400 cSt at 50°C (50°E at 50°C) - MECHANICAL ATOMIZATION

HEAVY OIL

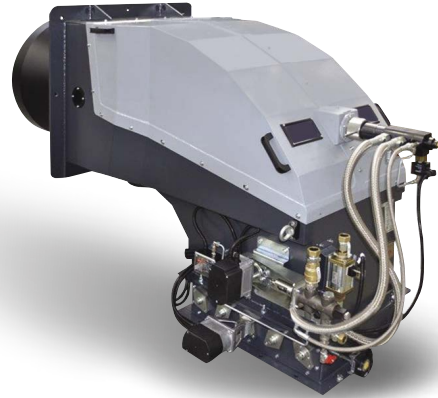

Type	Min. modulation output kW	Min. application output kW	Max output kW
<b>TN90</b>	264	1.330	1.900
<b>TN91</b>	698	1.465	2.093
<b>TN92</b>	849	1.791	2.558
<b>TN510</b>	1.314	2.767	3.953
<b>TN515</b>	1.628	3.419	4.884
<b>TN520</b>	2.326	4.884	6.977
<b>TN525</b>	2.000	6.825	9.750
<b>TN1030</b>	2.500	9.310	13.300
<b>TN1050</b>	3.500	10.850	15.500
<b>TN1080</b>	3.500	13.300	19.000
<b>TN2000</b>	3.600	15.400	22.000
<b>TN2500</b>	4.500	18.400	27.000
<b>TN3000</b>	5.500	27.300	39.000

## TECHNICAL DETAILS

Type	Model	Power kW		Pump motor	Resistor	Auxiliary electrical power supply	Motor electrical power supply
		min.	max.	kW	kW		
<b>TN90</b>	D-.xx.S.xx.G.xx	264	1.900	1,1	12	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN91</b>	D-.xx.S.xx.G.xx	698	2.093	1,1	18	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN92</b>	D-.xx.S.xx.G.xx	849	2.558	1,1	18	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN510</b>	D-.xx.S.xx.G.xx	1.314	3.953	1,1	24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN515</b>	D-.xx.S.xx.G.xx	1.628	4.884	1,5	12 + 18	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN520</b>	D-.xx.S.xx.G.xx	2.326	6.977	2,2	18 + 24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN525</b>	D-.xx.S.xx.G.xx	2.000	9.750	4,0	24 + 24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN1030</b>	D-.xx.S.xx.G.xx	2.500	13.300	5,5	24 + 24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN1050</b>	D-.xx.S.xx.G.xx	3.500	15.500	5,5	24 + 24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN1080</b>	D-.xx.S.xx.G.xx	3.500	19.000	5,5	24 + 24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN2000</b>	D-.xx.S.xx.G.xx	3.600	22.000	5,5	ON REQUEST	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN2500</b>	D-.xx.S.xx.G.xx	4.500	27.000	5,5/7,5	ON REQUEST	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
<b>TN3000</b>	D-.xx.S.xx.G.xx	5.500	39.000	5,5/7,5	ON REQUEST	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz