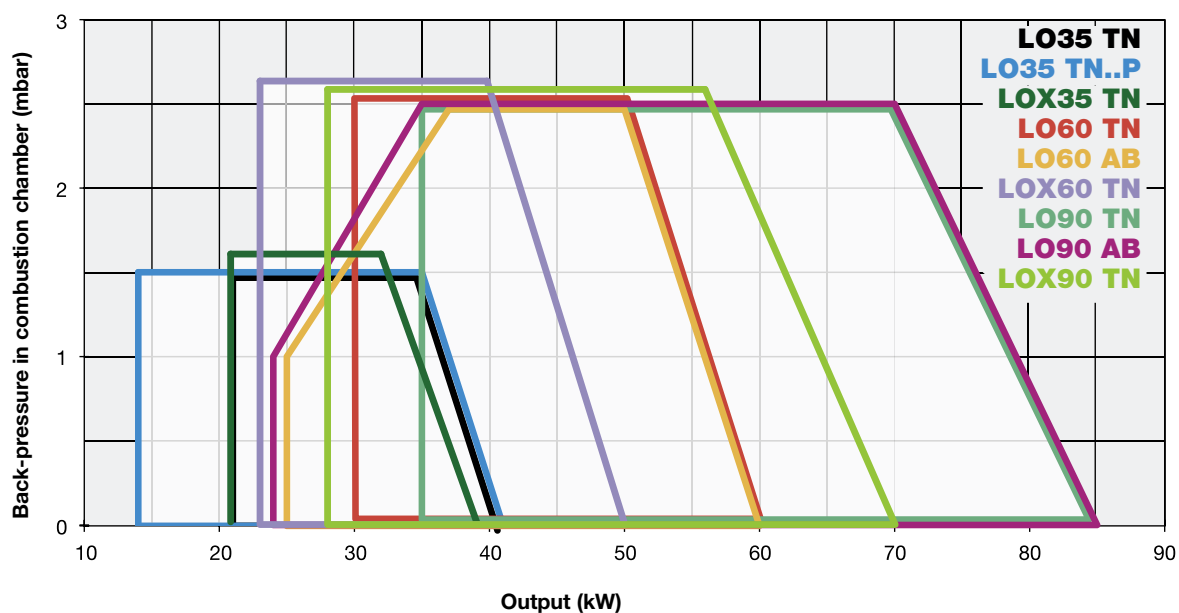



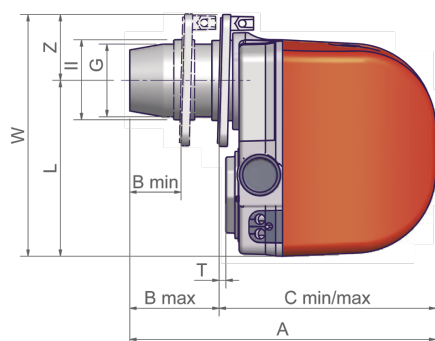


These light oil burners cover most of the civil installations and represent the best solution in terms of design and reliability. IDEA burners satisfy the specific requirements of the market, ensuring the maximum efficiency of the performance and easy maintenance. In particular, the removable baking plate of the components - common to the whole IDEA series - simplifies the technical assistance operations ensuring shorter maintenance times and great maneuverability.

Recently the new LOW NO_x series has been implemented.



TECHNICAL DETAILS

Type	Model	Power kW		Electric power supply	Fan motor kW
		min.	max.		
L035	G-.TN.x.xx.A	21	41	230 V 1N ac	0,075
L035	G-.TN.x.xx.A.P	14	41	230 V 1N ac	0,075
LOX35	G-.TN.x.xx.A	17	35	230 V 1N ac	0,075
L060	G-.TN.x.xx.A	30	60	230 V 1N ac	0,10
L060	G-.AB.x.xx.A	25	60	230 V 1N ac	0,10
LOX60	G-.TN.x.xx.A	24	50	230 V 1N ac	0,10
L090	G-.TN.x.xx.A	35	85	230 V 1N ac	0,10
L090	G-.AB.x.xx.A	24	85	230 V 1N ac	0,10
LOX90	G-.TN.x.xx.A	28	70	230 V 1N ac	0,10

Suggested
boiler drilling

Burner flange

Type	Packaging dimensions (mm)			
	l	p	h	kg
L035	290	260	490	10
LOX35	290	260	490	10
L060	400	300	520	14
LOX60	400	300	520	14
L090	400	300	520	14
LOX90	400	300	520	14

Approximate values

Type	Model	Overall dimensions (mm)																				
		A	B		C		D	E	F	G	H	II	K	L	M	N	O		P	T	W	Z
			min.	max.	min.	max.											min.					
L035	G-.TN.S.xx.A	338	58	100	238	280	269	14	255	80	95	88	145	194	M8	153	96	120	108	6	266	72
L035	G-.TN.L.xx.A	416	58	178	238	358	269	14	255	80	95	88	145	194	M8	153	96	120	108	6	266	72
LOX35	G-.TN.S.xx.A	338	58	100	238	280	269	14	255	80	95	88	145	194	M8	153	96	120	108	6	266	72
LOX35	G-.TN.L.xx.A	416	58	178	238	358	269	14	255	80	95	88	145	194	M8	153	96	120	108	6	266	72
L060	G-.xx.S.xx.A	365	58	71	274	307	305	14	291	80	95	88	145	218	M8	153	96	120	108	2	291	72
L060	G-.xx.L.xx.A	443	58	169	274	385	305	14	291	80	95	88	145	218	M8	153	96	120	108	2	291	72
LOX60	G-.TN.S.xx.A	365	58	71	274	307	305	14	291	80	95	88	145	218	M8	153	96	120	108	2	291	72
LOX60	G-.TN.L.xx.A	443	58	169	274	385	305	14	291	80	95	88	145	218	M8	153	96	120	108	2	291	72
L090	G-.xx.S.xx.A	365	58	71	294	307	305	14	291	80	95	88	145	218	M8	153	96	120	108	2	291	72
L090	G-.xx.L.xx.A	443	58	149	294	385	305	14	291	80	95	88	145	218	M8	153	96	120	108	2	291	72
LOX90	G-.TN.S.xx.A	365	58	71	294	307	305	14	291	80	95	88	145	218	M8	153	96	120	108	2	291	72
LOX90	G-.TN.L.xx.A	443	58	149	294	385	305	14	291	80	95	88	145	218	M8	153	96	120	108	2	291	72

Approximate values

